

Corning® Gosselin™ Water Sample Collection Bottle

Clear, sterile collection bottle pre-dosed with sodium thiosulfate

CORNING



The Corning Gosselin water sample collection bottle is designed to meet rigorous North American regulations. The 250 mL bottle comes pre-dosed with sodium thiosulfate and is made from lightweight polyethylene terephthalate (PET) plastic that is transparent as glass but break-resistant.


The sodium thiosulfate is pentahydrated to increase its stabilizing action on chlorinated water. The 160 mg/L dosage is in accordance with the 22nd edition of the Standard Method published by the American Public Health Association (APHA), the American Water Works Association (AWWA), and the Water Environment Federation (WEF). It can neutralize up to 15 mg/L of free chlorine in water samples.

Key Features

- ▶ Sterile
- ▶ Easy grip cap
- ▶ Wide neck for easier sample collection
- ▶ Convenient shrink-wrapped packs of 24 bottles
- ▶ Molded graduations for accurate volume sample collection
- ▶ Tamper-evident screw cap to ensure integrity until collection
- ▶ Labeled with lot number, expiration date, and sodium thiosulfate dosage information



Tamper-evident screw cap

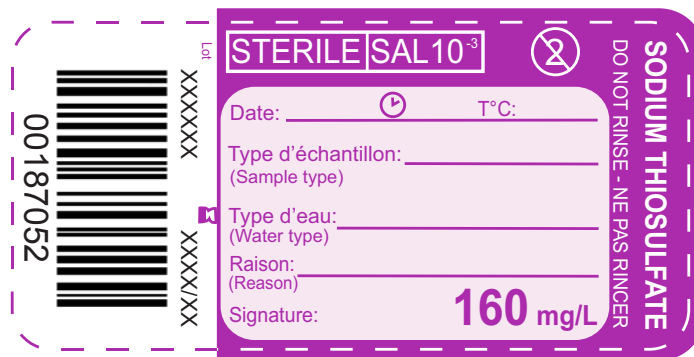

Bar coded labels for sample traceability from collection to analysis.

Ordering Information

Corning® Gosselin™ Square Polyethylene Terephthalate (PET) Water Sample Collection Bottle

Cat. No.	Description	Qty/Pk	Qty/Cs
HP250B-55	250 mL square, PET, 34.7 mm tamper-evident screw cap, contains 160 mg/L dosage of sodium thiosulfate, sterile	24	144

Visit www.corning.com/lifesciences for a complete listing of Corning storage bottles and these other technical resources:

- ▶ Properties of Corning plasticware
- ▶ Chemical compatibility of Corning plasticware

For more specific information on claims, visit the Certificates page at www.corning.com/lifesciences.

Warranty/Disclaimer: Unless otherwise specified, all products are for research use only. Not intended for use in diagnostic or therapeutic procedures. Corning Life Sciences makes no claims regarding the performance of these products for clinical or diagnostic applications.

For additional product or technical information, visit www.corning.com/lifesciences or call 800.492.1110. Outside the United States, call +1.978.442.2200 or contact your local Corning sales office.

CORNING

Corning Incorporated
Life Sciences

836 North St.
Building 300, Suite 3401
Tewksbury, MA 01876
t 800.492.1110
t 978.442.2200
f 978.442.2476

www.corning.com/lifesciences

ASIA/PACIFIC

Australia/New Zealand
t 61 427286832

China
t 86 21 3338 4338
f 86 21 3338 4300

India
t 91 124 4604000
f 91 124 4604099

Japan

t 81 3-3586 1996
f 81 3-3586 1291

Korea

t 82 2-796-9500
f 82 2-796-9300

Singapore

t 65 6572-9740
f 65 6861-2913

Taiwan

t 886 2-2716-0338
f 886 2-2516-7500

EUROPE

CSEurope@corning.com

France

t 0800 916 882
f 0800 918 636

Germany

t 0800 101 1153
f 0800 101 2427

The Netherlands

t 020 655 79 28
f 020 659 76 73

United Kingdom

t 0800 376 8660
f 0800 279 1117

All Other European Countries

t +31 (0) 206 59 60 51
f +31 (0) 206 59 76 73

LATIN AMERICA

grupoLA@corning.com

Brasil

t 55 (11) 3089-7400

Mexico

t (52-81) 8158-8400